

THE XTREME DIFFERENCE.

Long Life Boom Rollers

Rollers eliminate chatter, delivering smoother boom operation



10-5-2 WARRANTY

10 YEARS OR 10,000 HOURS
FRAME & CHASSIS WELDMENT

5 YEARS OR 5,000 HOURS
BOOM WELDMENT & ROLLERS

2 YEARS OR 2,000 HOURS
ENGINE, ELECTRICAL, TRANSMISSION,
DRIVE AXLES & HYDRAULIC COMPONENTS



360° Visibility

Operator can view the entire working area around the telehandler



Intuitive Operator Controls

Function boom and chassis sway controls with one arm



WE DON'T DO AVERAGE.

At Xtreme Manufacturing, we build the largest range of heavy duty and high capacity telehandlers in North America. And we build them to outlast and outperform anything else in the industry — period. In fact, we set the standard for safety, productivity and reliability. Plus, we back all of our telehandlers up with an unmatched **10 year • 5 year • 2 year warranty.**

Downtime is the enemy of any jobsite. So, we design our machines to be super heavy duty and very low maintenance, greatly reducing downtime and lowering total ownership costs across the life of the machine. But we're not just tough, we're smart, too. Xtreme telehandlers feature cabs with 360-degree operator visibility, and intuitive controls so operators can keep one hand on the steering wheel at all times. Because safety is as important to us as strength. It's not about meeting industry standards, it's about setting them. Because we don't do average. **And that's what makes us different.**

*Standard features may vary across individual models. Consult your sales representative for more details.

STANDARD FEATURES*

- Long life boom rollers
- 360° visibility
- Boom lift point
- Intuitive operator controls
- Standard auxiliary hydraulics
- Solid steel plate chassis
- Steel dash
- Ductile steel manifold
- Easy cab mounted grab handles
- Reliable tier 4 compliant engines
- Master disconnect switch
- Axle mounted outriggers
- Wider outrigger stance
- Large cross section boom
- Easy tie downs
- Heavy duty pre-cleaner
- Additional high pressure hydraulic filter
- Direct engine/transmission connection
- Display screen
- Suspension seat
- Easy service access
- Protected tilt & extend cylinders
- Steel hydraulic & fuel tanks
- Long life Lexan labels
- Heavy duty boom chains
- Suspended pedals
- Electrical ring terminals
- Large capacity fuel tanks
- Trunnion mounted sway cylinders
- Melomite pins
- Rear axle stabilization (RAS)
- Center mounted power train



CABS, TIRES, CARRIAGES, & ATTACHMENTS



CAB OPTIONS

All Xtreme telehandlers are available with a choice of open cab, enclosed cab, or enclosed cab with heat and air conditioning.

Please speak with your Xtreme sales representative for more details.

TIRE OPTIONS



G2 FOAM FILLED
Offers great tread depth, the G2 tread clears debris for improved traction.



E3 FOAM FILLED
Provides great traction and stability when run either off-road or on hard surfaces.



XTREME SOLID TIRE
Xtreme solid tires provide a stable, cushioned, flat proof ride that is essential for both safety and productivity.

FIXED CARRIAGE

Floating forks and adjustable side-to-side for efficient load entry and exit.

- Range from 48" to 96"



SWING CARRIAGE

Allows for greater versatility in moving and placing materials in confined areas or when exact positioning is required.

- Range from 52" to 72"



SIDE SHIFT CARRIAGE

Four-inch left and right carriage shift allows for precision load placement.

- Range from 48" to 96"



ADJUSTABLE CARRIAGE

Fork positioning provides the ability to adjust the position of the forks, allowing the operator to handle a variety of loads without having to leave the cab.

- Range from 48" to 111"



SIDE TILT CARRIAGE

Tilts loads from side-to-side and allows for minor lateral positioning of the load during final placement.

- Range from 48" to 72"



PIPE & POLE GRAPPLE

Designed for handling multiple pipes or larger single pipe.

- Range from 72" to 96"
- Available with and without shoe



PALLET FORK

Rugged fork design makes it easier to handle heavy palletized material.



LUMBER FORK

Wide forks provide a larger surface area for stability when transporting larger materials.



CUBING FORK

Allows operator to handle cubes of brick and block with ease.



PERSONNEL PLATFORM

Extend the capabilities of your Xtreme telehandler by lifting personnel and materials.

- Range from 4'x4' to 8'x8'



TRUSS BOOM

Allows operator to set trusses and wall sections for wood and steel building construction.

- Range from 3' to 15'
- Available with and without winch



SLING MOUNT

Provides ability to handle suspended loads. Pick and tilt for precise load placement.



PINTEL HOOK

Versatile tow point for movement of equipment and material.



GENERAL PURPOSE BUCKET

Material bucket to carry loose dirt, materials and debris. The bucket can also be used for clean up around the job site.

- Range from 1.00yd to 2.00yd
- Available with or without bolt on cutting edge



GRAPPLE BUCKET

Features a hydraulic grapple arm to secure bulky loads and assist in job site clean up.



TIRE MANIPULATOR

Designed for the safe installation and removal of wheel assemblies from large construction and mining equipment, this fully integrated attachment utilizes Xtreme's existing in-cab controls for safe and seamless operation. The tire manipulator attachment is available to fit Xtreme telehandler models XR1055 and larger.



ROTOBEC

This pipe and pole grapple is used for vertical and horizontal material placement. It is a safe and efficient alternative for handling installation of everything from utility poles to gas pipelines.



For more information, contact Xtreme:
T: +1 (702) 636.2969
T: +1 (800) 494.1704 (toll-free)
Request a quote online at www.xmfg.com
Not all attachments are available for all models. Capacity rating for bed only, vehicle capacity rating dependent on final configuration of chassis, options installed, road regulations, and drivetrain specifications.




XTREME E-ZLOADER™

CUSTOM DELIVERY TRUCK BEDS



- **BULKHEAD BOLTED TO FRAME**
- **TRACTION PLATE FULL RAMP**
- **17 SECOND RAMP DEPLOYMENT**
- **DOCK LOADING ABILITY**

	ET12	ET18	ET24
Bed capacity	12,000 lbs	18,000 lbs	24,000 lbs
Dove tail lift capacity	8,000 lbs	10,000 lbs	15,000 lbs
Tow capacity	5,000 lbs	8,000 lbs	10,000 lbs
Approximate G.V.W.	26,000 lbs	33,000 lbs	48,000 lbs
Hydraulic P.T.O.	14 GPM	14 GPM	14 GPM
Overall bed (W x L)	8' 6" x 21' 3"	8' 6" x 25' 3"	8' 6" x 27' 6"
Main bed (W x L)	8' 6" x 13' 5"	8' 6" x 17'	8' 6" x 17' 3"
Dove tail (W x L)	8' 6" x 7' 5"	8' 6" x 8'	8' 6" x 10'
Flip tail (W x L)	8' 6" x 4' 7"	8' 6" x 5' 3"	8' 6" x 5' 3"
Bulk head height	5'	5'	5'
Cab to axle length	11' 6"	15' 5"	13' 8"
Ramp length	11' 11"	13' 4"	14' 9"
Bed height	3' 5"	3' 10"	4'
Max dock height	5' 5"	5' 6"	6' 3"
Ramp angle	18° / 32%	18° / 32%	15° / 27%
Hitch receiver tube	2"	2"	2"
Wood thickness	1"	1"	1"

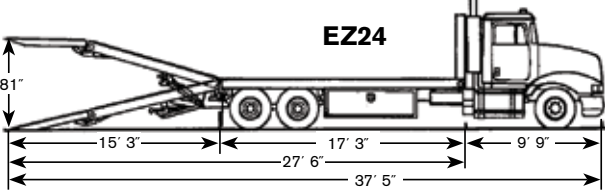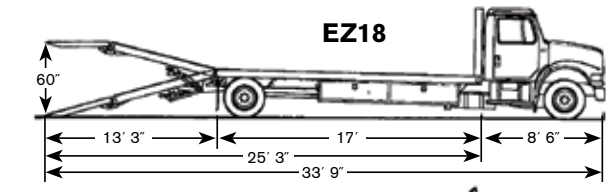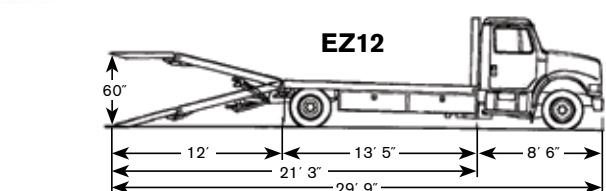

LEGEND FOR CONTROL VALVE



OPTIONAL CENTER TIE DOWNS



OPTIONAL HYDRAULIC WINCH

XTREME™

MANUFACTURING

TELEHANDLERS

Xtreme telehandlers are proudly manufactured in Henderson, Nevada, USA, and are sold and serviced throughout the USA, Canada, Latin America, Australia, and beyond.

Learn more and request a quote online at www.xmfg.com.

XTREME MANUFACTURING, LLC
8350 Eastgate Road, Henderson, NV 89015, USA
T: +1 (702) 636.2969
T: +1 (800) 494.1704
(toll-free)

1 YEAR ALL COMPONENTS
3 YEAR STRUCTURAL WARRANTY
(Bed only)
www.xmfg.com/e-zloaders

Note: Dimensions may change depending on truck manufacturer and model. Capacity rating for bed only, vehicle capacity rating dependent on final configuration of chassis, options installed, road regulations, and drivetrain specifications.

Specifications subject to change without notice. Photos, diagrams and load charts in this brochure are for promotional purposes only. Refer to the appropriate Xtreme operation manual for detailed instructions on proper use, specifications, and maintenance of equipment. Weight of machines is based on open cab model with foam filled tires.

© Xtreme 2021

